



PRODUCT BULLETIN



1020 S. SANGAMON AVE PH: 800-221-2855 (OPT 3)
GIBSON CITY, IL 60936 FAX: 800-451-1653



TO: Rhino Dealers, FSM's and Sales Representatives

DATE: 09/26/2016

SUBJECT: New Product Release

**PRUODUCT
BULLETIN:** DB-09-26-16

PRODUCT: Rhino MDB130

We are excited to announce the addition of the MDB130 to our Ditch Bank Rotary Cutter lineup. This unit is Mechanically Driven and is available in 540 or 1000 RPM. Its 60" Cut rotary head is equipped with the Infinity Blade Carrier that will power through material up to 2" thick.

We are accepting orders now for Fall 2016 delivery. Please review the attached Price Pages and Literature Sheet for details.

Regards,

Lyndon Dittus



New!

MDB130

Mechanically Driven Ditch Bank Mower

| STANDARD EQUIPMENT & SPECIFICATIONS | |
|-------------------------------------|-------------------------------------|
| Cutting Width: | 60" |
| Transport Width: | 60" |
| Overall Width (Skid to Skid): | 69 1/2" |
| Overall Length (Guard - Guard): | 83 1/4" |
| Cutting Height: | 1 1/2" - 12" |
| Hitch: | CAT 2 Std & CAT 3 Std |
| Blade Carrier: | Infinity - Cast |
| Blades: | 1/2" x 4" |
| Blade Rotation: | Counter Clockwise |
| PTO HP Required (Min): | 60 w/ 25% of Weight on Front Wheels |
| Min Tractor Weight: | 5,000 lbs |
| Gearbox HP: | Center Deck 100 Deck 130 |
| Tractor PTO Speed: | 540 RPM 1000 RPM |
| Drive Type: | Mechanical |
| Mechanical Breakaway: | Std |
| Blade Tip Speed: | 540 RPM 13,904 1000 RPM 14,128 |
| Horizontal Reach (Max): | 130" |
| Cutting Capacity (Max): | 2" |
| Driveline Size: | CAT 4 |
| Overload Protection: | Slip Clutch |
| Deck Thickness: | 10 Ga |
| Side Skirt: | 7 Ga x 9 1/8" |
| Range of Head Movement: | 40° Up / 40° Down |
| Skid Shoes: | Std |
| Safety Guarding: | Single Chains |
| Weight (Approx): | 1,900 lbs |



Shown with Extra Equipment


| ORDERING SECTION | | | |
|---------------------------|---|------------------------------|-------------------|
| CATALOG NUMBER | DESCRIPTION | APPROX SHIPPING WEIGHT (LBS) | LIST PRICE (\$US) |
| BASE UNIT - MDB130 | | | |
| MDB130540 | MDB130 Ditch Bank Mower, w/ Chain Guards - 540 RPM 1 3/8 6 Spline | 2,150 | \$10,255 |
| MDB130100 | MDB130 Ditch Bank Mower, w/ Chain Guards - 1000 RPM 1 3/8 21 Spline | 2,150 | \$10,255 |
| EXTRA EQUIPMENT | | | |
| 00792126 | Side Mount Gauge Wheel (4" x 8" Laminated) | | \$560 |

MDB130

Mechanically Driven
Ditch Bank Mower



-  130" Horizontal Reach
-  Available in 540 or 1000 RPM
-  60" Cutting Width
-  Slip Clutch Protection
-  2" Cut Capacity

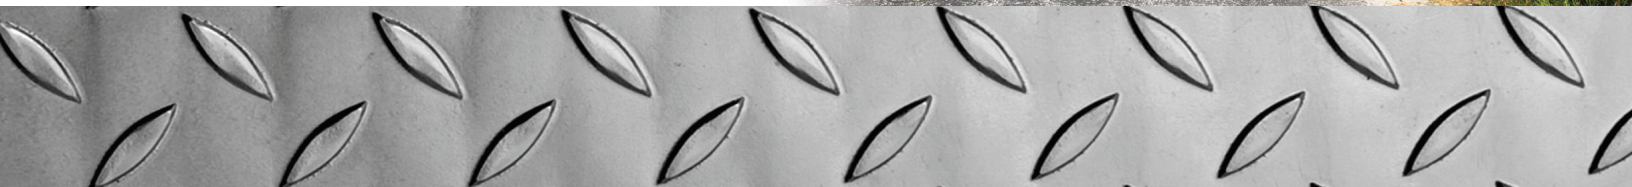

MDB130

SPECIFICATIONS

STANDARD EQUIPMENT & SPECIFICATIONS

| | | |
|---------------------------------|---------------------|-------------------------------------|
| Cutting Width: | | 60" |
| Transport Width: | | 60" |
| Overall Width (Skid to Skid): | | 69 1/2" |
| Overall Length (Guard - Guard): | | 83 1/4" |
| Cutting Height: | | 1 1/2" - 12" |
| Hitch: | | CAT 2 Std & CAT 3 Std |
| Blade Carrier: | | Infinity - Cast |
| Blades: | | 1/2" x 4" |
| Blade Rotation: | | Counter Clockwise |
| PTO HP Required (Min): | | 60 w/ 25% of Weight on Front Wheels |
| Min Tractor Weight: | | 5,000 lbs |
| Gearbox HP: | Center Deck | 100 130 |
| Tractor PTO Speed: | | 540 RPM 1000 RPM |
| Drive Type: | | Mechanical |
| Mechanical Breakaway: | | Std |
| Blade Tip Speed: | 540 RPM 1000 RPM | 13,904 14,128 |
| Horizontal Reach (Max): | | 130" |
| Cutting Capacity (Max): | | 2" |
| Driveline Size: | | CAT 4 |
| Overload Protection: | | Slip Clutch |
| Deck Thickness: | | 10 Ga |
| Side Skirt: | | 7 Ga x 9 1/8" |
| Range of Head Movement: | | 40° Up / 40° Down |
| Skid Shoes: | | Std |
| Safety Guarding: | | Single Chains |
| Weight (Approx): | | 1,900 lbs |



Shown with Extra Equipment

