

Keep with Operators Manual

## GRILLE GUARD NEW HOLLAND TRACTORS

MODEL	2WD	4WD	Less Cab	With Cab
TN55, TN60A, TN65, TN70, TN70A, TN75, TN75A	X	X	X	
TN55D, TN60DA, TN65D, TN70D, TN70DA, TN75D, TN75DA	X	X		X

Guard can be installed using tools ordinarily available.

Torque all hardware to specifications listed in loader operator's manual.


### INSTALLING GRILLE GUARD (Figure 1)

1. Install lower support brackets (2) to tractor casting using 20MM x 50MM cap screws (6), 20MM lock washers (4) and spacers (3).

**NOTE:** Spacers are not required when 7310 loader is mounted on tractor.

2. Attach grille guard assembly (1) to lower support brackets (2) using 1/2 x 1-1/2 cap screws (5) and 1/2 lock nuts (7).

**NOTE:** Attach grille guard assembly (1) with corner trim facing away from front of tractor.

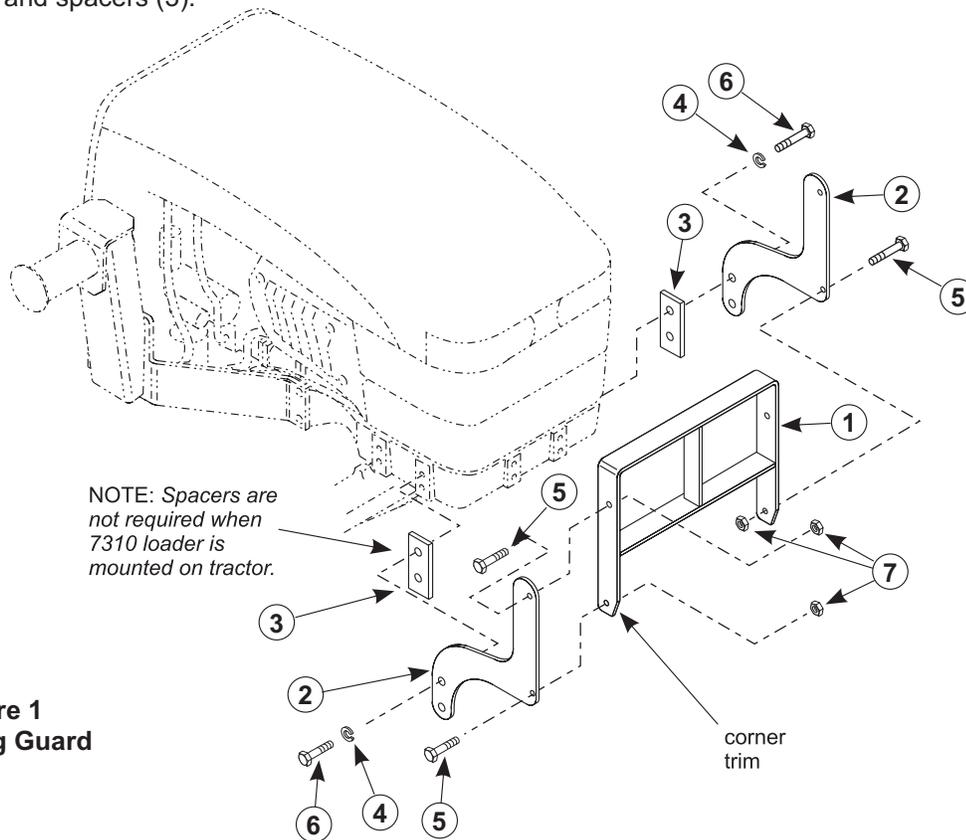

**Figure 1**  
Installing Guard

ITEM	SMC NO.	NH NO.	DESCRIPTION	QTY.
1	46656	SML46656	GRILLE GUARD ASSEMBLY	1
2	47219	SML47219	BRACKET, Lower support	2
3	43786	SML43786	SPACER	2
4	G11500166	09847025	WASHER, Lock, 20mm	4
5	G180177	00087689	SCREW, Cap, 1/2-13 x 1-1/2	4
6	6090-107	09847023	SCREW, Cap, 20mm-2.50 x 50mm	4
7	G9414074	09636698	NUT, Lock, 1/2-13	4

2-6661  
2-6946

715825016  
715825056

# **INSTALLATION INSTRUCTIONS**